


MB 240 EVO

Key features

- Crimp force of up to 240 tonnes for hoses up to 2"
- Easy to use and robust
- Radial die movement
- High crimping force
- Extensive range of dies to suit crimping of hydraulic hoses
- Easy set up and maintenance
- Fast and reliable

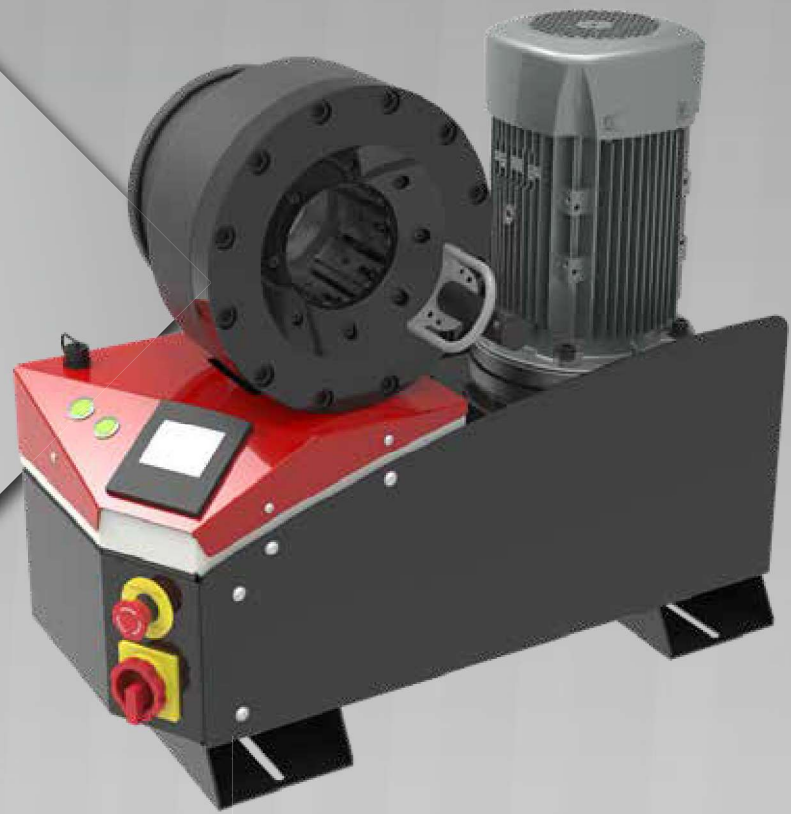

Technical Specifications

Dimensions:	765 x 400 x 650 mm (30 x 16 x 26")	Motor:	4.0 kW
Net Weight:	165 kg (364 lb)	Crimp Range:	4 - 76 mm (0.157 - 2.992")
Voltages:	220/240 V, 3Ph, 50 Hz 380/415 V, 3Ph, 50 Hz 208/240 V, 3Ph, 60 Hz 380/415 V, 3Ph, 60 Hz	Crimp Force:	240 t
Capacity:	2wb: 2" max. 4ws: 2" max. 6ws: 1" max.	Opening with Dies:	+38 mm (+1.496")
		Complete Opening:	118 mm (4.645")
		Master Die Length:	100 mm (3.937")
		Standard Dies:	15, 18, 21, 24, 27, 30, 33, 36, 39, 42, 45, 48, 51, 57, 62, 66, 70, 72
		Technical Features:	Other voltages available on request ,SC and SCS version available

Hose and Fitting Selection

Hose Type	Fittings Type	Max. Hose Size	Ref. Hoses
2 Wire Braid & Textile	MF2000 Multifit; MF3000 OPF; MF3000 OPK	2"	Tractor; Harvester; Lyteflex; Pilot; Cover; Equator; Rockmaster (braided); Shieldmaster (braided); Astro; Multitex; Hydroplast; Spirtex/K
4 Wire Spirals	MF2000 Multifit; MF3000 OPF; MF3000 OPK	2"	Rockmaster (spiral); Shieldmaster (spiral); GoldenISO Xtraflex
4 Wire Spirals	MF2000 Interlock Plus; MF2000 Xtralock; MF2000 Spiralfit	1 1/4"	Rockmaster (spiral); Shieldmaster (spiral); GoldenISO Xtraflex
6 Wire Spirals	MF2000 Interlock Plus; MF2000 Xtralock	1"	Diamondspir; Goldenblast/Six



Performances measured on a 400 V, 3Ph, 50 Hz network

Ordering Information

Product Code	Description
EOA3324NMB240ESC	MB240 EVO SC 380/415V 3PH 50HZ without dies
EOA3324NMB240ESCE	MB240 EVO SCE 380/415V 3PH 50HZ without dies
EOA3324NMB240ESCS	MB240 EVO SCS 380/415V 3PH 50HZ without dies