


# MB 350 EVO

## Key features

- Crimp force of up to 350 tonnes for hoses up to 3"
- Easy to use and robust
- Automatic maintenance alerts
- Groove for 90° long drop fittings
- Also available as MB 350 L with 4.0 kW motor

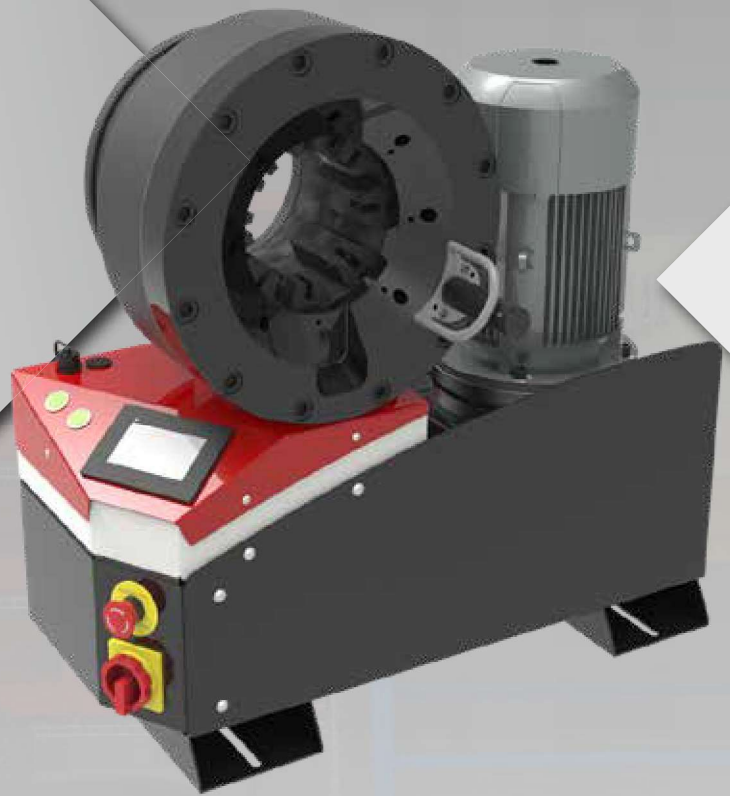

## Technical Specifications

<b>Dimensions:</b>	765 x 400 x 750 mm (30 x 16 x 30")	<b>Motor:</b>	5.5 kW
<b>Net Weight:</b>	262 kg (578 lb)	<b>Crimp Range:</b>	4 - 130 mm (0.157 - 5.118")
<b>Voltages:</b>	220/240 V, 3Ph, 50 Hz	<b>Crimp Force:</b>	350 t
	380/415 V, 3Ph, 50 Hz	<b>Opening with Dies:</b>	+54 mm (+2.125")
	208/240 V, 3Ph, 60 Hz	<b>Complete Opening:</b>	180 mm (7.086")
	380/415 V, 3Ph, 60 Hz	<b>Master Die Length:</b>	115 mm (4.523")
<b>Capacity:</b>	2wb: 3" max.	<b>Standard Dies:</b>	15, 18, 21, 24, 27, 30, 33, 36, 39, 42, 45, 48, 51, 57, 62, 66, 70, 72, 73, 76
	Textile / Suction Hose: 4" max.	<b>Technical Features:</b>	- Automatic maintenance alerts
	4ws: 2" max.		- Cylinder protection against dust - durable design
	6ws: 2" max.		- Also available as MB 350 EVO L with 4.0 kW Motor
<b>Safety remarks:</b>			- SC and SCE version available
	Please consider hose-fitting-machine integration when crimping. Possible limitations in case of double elbow fittings.		

## Hose and Fitting Selection

Hose Type	Fittings Type	Max. Hose Size	Ref. Hoses
2 Wire Braid & Textile	MF2000 Multifit; MF3000 OPF; MF3000 OPK	3" with extra dies	Tractor; Harvester; Lyteflex; Pilot; Cover; Equator; Rockmaster (braided); Shieldmaster (braided); Astro; Multitex; Hydroplast; Spirtex/K
4 Wire Spirals	MF2000 Multifit; MF2000 Interlock Plus; MF2000 Spiralfit; MF3000 OPF; MF3000 OPK	2"	Rockmaster (spiral); Shieldmaster (spiral); GoldenISO Xtraflex; Goldenblast
6 Wire Spirals	MF2000 Interlock Plus; MF2000 Spiralfit	2"	Rockmaster/13; GoldenIso/35 Xtraflex; Goldenblast
6 Wire Spirals	MF2000 Interlock Plus; MF2000 Spiralfit; MF2000 Xtralock	1 1/2"	Diamondspir; Rockmaster/15; GoldenISO/42 Xtraflex; Shieldmaster/6000



Performances measured on a 400 V, 3Ph, 50 Hz network

## Ordering Information

Product Code	Description
EOA3324NMB350ESC	MB350 EVO 5,5 kW 380-415V 3PH 50 Hz without dies
EOA3324NMB350ESCE	MB350 EVO 5,5 kW 220-240V 3PH 50 Hz without dies
EOA3324NMB350ESCS	MB350 EVO 5,5 kW SCS 380-415V 3PH 50 Hz without dies